

Street Elbows 90° F/M


EF92 | CF8M (1.4408, V4A) | ISO7-1 (R/Rp)

Article No.	Standard		Dimension (mm)		
	Size	DN	A	B	C
21220021	1/8	6	14.5	15.4	23
21220022	1/4	8	18	17.6	27
21220023	3/8	10	22	20.5	30
21220024	1/2	15	25.4	20.5	30
21220025	3/4	20	31.1	24	34.5
21220026	1	25	38.3	30	39.5
21220027	1-1/4	32	47.8	35.5	46.5
21220028	1-1/2	40	54	38.5	49.5
21220029	2	50	66.5	48	60.5
21220030	2-1/2	65	85.9	62.5	87
21220031	3	80	101	79.3	106.5
21220032	4	100	131.5	100.5	126.3



- PN20 /300lbs cast fittings, CF8M (1.4408, V4A) cast version of 316 (1.4401)
- Thread acc. to ISO 7-1, DIN EN 10226-1 (old DIN 2999 & BS21); parallel female thread Rp (BSPT) & taper male thread R (BSPT).
- Pressure ratings:

Temperature C°	Non-shock max. working pressure bar
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

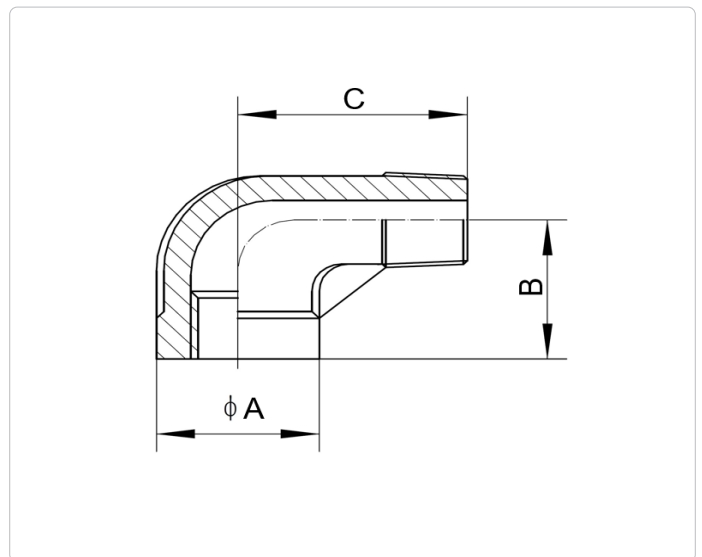

*Temperatures indicated are those of internal fluid
Piping loads, stresses and moments are not taken into account.