

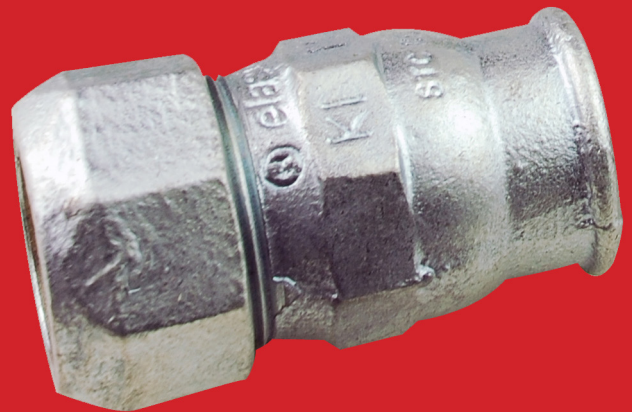


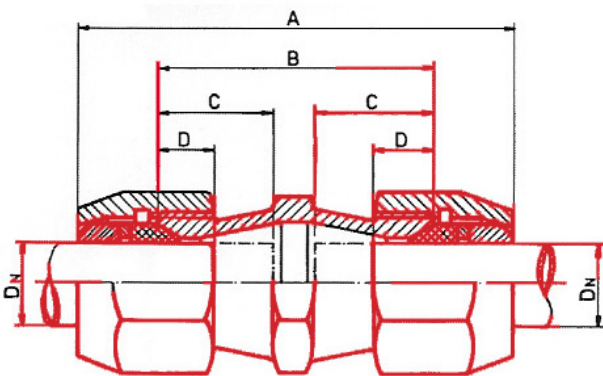

H-elastic Compression Fittings

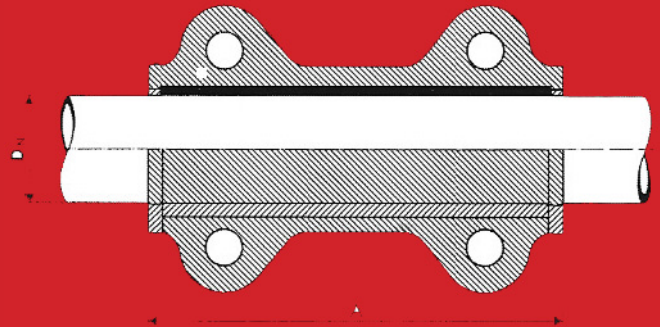

STARFIT H-elastic Compression Fittings

Structure:

1. Fitting body: high-quality cast malleable iron (Design A) EN-GJMB 350-10, EN 1562, hot-dip galvanized according to EN 10242, electr. galvanized after machining operations
2. Nut: high-quality cast malleable iron (Design A) EN-GJMB 350-10, EN 1562, hot-dip galvanized according to EN 10242, electr. galvanized after machining operations
3. Conical seal: NBR
4. Washer: steel St 37-3, galvanized
5. Conical clamping ring: Brass or steel, galvanized
6. Pipe



STARFIT H-elastic Compression Fittings

Fields of Application:

1. Repairs to existing pipelines and new installations of pipes for the fluids of water, gas, compressed air, heating oil
2. Suitable for permanent use
3. Time saving because threading and welding is not necessary
4. Suitable for steel tubes according to DIN EN 10255
(formerly 2440, 2441, 2442, 2448 (series 1), 2458 (series 1))
5. Approved for drinking water installation (cold water) 1/2" ~ 2" steel tubes / threaded tubes DIN 2440 / 2444 according to W534 DIN-DVGW
6. Special applications: suitable for domestic water, oil, petrol and other media
7. Medium: water / gas
8. Temperature range: water +80 ° C / gas -20 ° C to +70 ° C
9. Operating pressure: water PN16 / Gas PN4
10. Connection thread: ISO 7/1 DIN EN 10226/1 (formerly DIN 2999)
11. Bending possible up to 3°
12. Marking: H-elastic




STARFIT H-elastic Compression Fittings

H - Elastic REP



Typ  - elastic REP


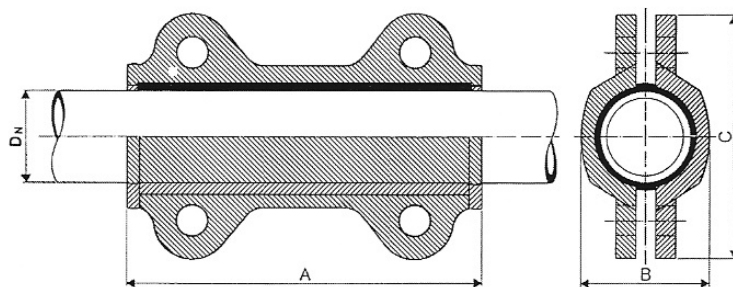


Type KK	Tube diameter DN (mm)	Size (mm)		
		A	B	C
1/2"	21,3	141	38	85
3/4"	26,9	141	44	89
1"	33,7	142	50	96
1-1/4"	42,4	142	63	107
1-1/2"	48,3	142	68	114
2"	60,3	142	83	128
2 1/2"	76,1	140	98	140
3"	88,9	140	116	160

STARFIT H-elastic Compression Fittings

H - Elastic KI

Typ  - elastic KI

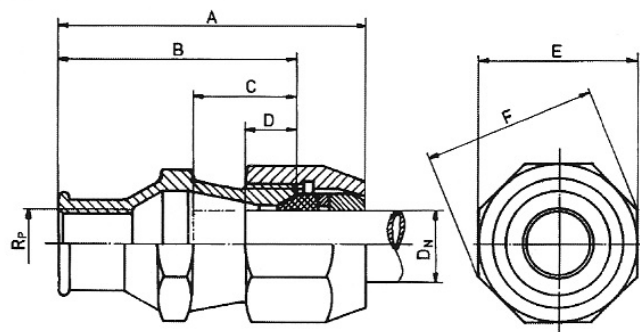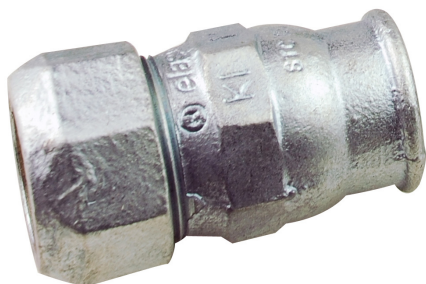


Type KI	Tube diameter Ø DN (mm)	Internal thread Rp	Size (mm)					
			A	B	C	D	E	F
1/2"	21,3	1/2"	90	70	27	13	44	47
3/4"	26,9	3/4"	90	70	26	13	48	52
1"	33,7	1"	95	75	25	15	55	59
1-1/4"	42,4	1-1/4"	110	90	37	15	66	71
1-1/2"	48,3	1-1/2"	120	101	39	15	74	79
2"	60,3	2"	130	110	42	19	91	97
2 1/2"	76,1	2 1/2"	150	115	60	20	110	118
3"	88,9	3"	175	145	70	20	120	130

STARFIT H-elastic Compression Fittings

H - Elastic KA



Typ **H** – elastic KA

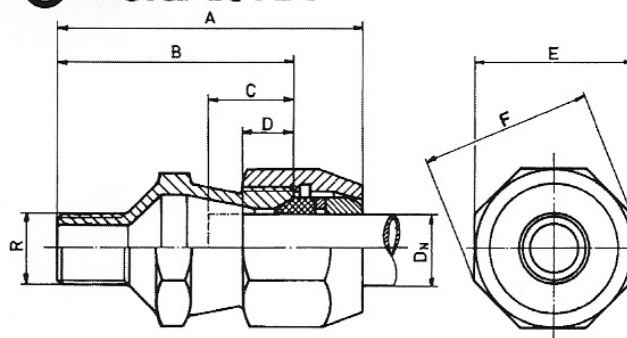


Type KA	Tube diameter Ø DN (mm)	External thread R	Size (mm)					
			A	B	C	D	E	F
1/2"	21,3	1/2"	89	70	27	14	44	47
3/4"	26,9	3/4"	89	70	28	14	48	52
1"	33,7	1"	94	74	29	15	54	59
1-1/4"	42,4	1-1/4"	110	90	37	15	67	72
1-1/2"	48,3	1-1/2"	120	100	40	15	74	79
2"	60,3	2"	130	110	47	19	91	97
2 1/2"	76,1	2 1/2"	160	125	60	20	110	118
3"	88,9	3"	185	155	70	20	120	130

STARFIT H-elastic Compression Fittings

H - Elastic TKI



Typ $\textcircled{H}$ - elastic TKI

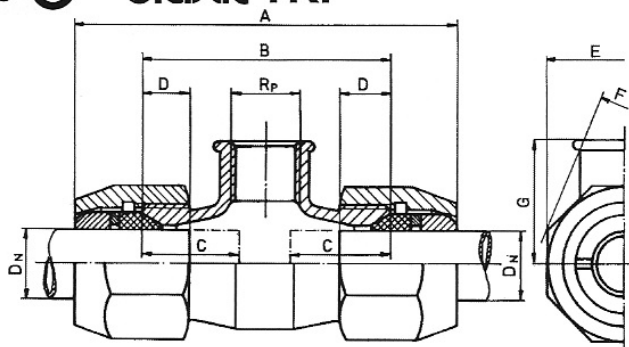


Type TKI	Tube diameter Ø DN (mm)	Internal thread Rp	Size (mm)						
			A	B	C	D	E	F	G
1/2"	21,3	1/2"	112	75	25	13	44	47	33
3/4"	26,9	3/4"	120	80	30	13	48	52	37
1"	33,7	1"	127	90	30	15	55	59	43
1-1/4"	42,4	1-1/4"	145	105	40	15	66	71	48
1-1/2"	48,3	1-1/2"	155	115	42	15	74	79	56
2"	60,3	2"	190	140	50	19	91	97	64
2 1/2"	76,1	2 1/2"	250	182	70	20	110	118	90
3"	88,9	3"	260	197	85	20	120	130	101

STARFIT H-elastic Compression Fittings

H - Elastic KK



Typ **H** – elastic KK

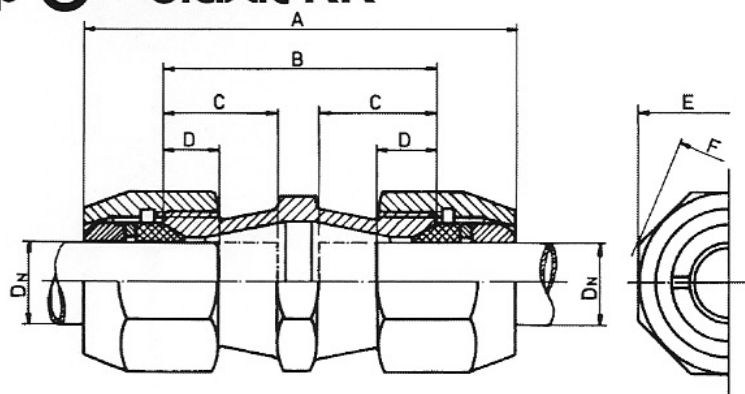

Type KK	Tube diameter Ø DN (mm)	Size (mm)					
		A	B	C	D	E	F
1/2"	21,3	110	70	25	14	44	47
3/4"	26,9	110	70	27	14	48	52
1"	33,7	110	75	30	15	55	59
1-1/4"	42,4	120	80	32	15	66	71
1-1/2"	48,3	134	91	40	16	74	79
2"	60,3	150	100	43	19	91	97
2 1/2"	76,1	190	117	55	20	110	118
3"	88,9	205	140	65	20	120	130

Starfit China Ltd.

Room 2606, 26/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong
www.starfitchina.com.hk

Contact: Michael Hage
Tel.: +49 172 6603 498
E-mail: m-hage@starfitchina.com.hk

Contact: Peter Hage
Tel.: +49 162 2760 352
E-mail: pwhage@starfitchina.com.hk

Contact: Ewing Cheung
Tel.: +852 3571 8708
E-mail: ewing@starfitchina.com.hk
Telefax: +852 3571 9155

Contact: Agnes Chan
Tel.: +852 3571 8708
E-mail: agnes@starfitchina.com.hk
Telefax: +852 3571 9155

Contact: Lorenzo Costa
Tel.: +852 3421 2605
E-mail: lorenzo.costa@starfitchina.com.hk
Telefax: +852 3571 9155