


Red. Sockets

ISO4144 | EF240 | CF8M (1.4408, V4A) | ISO7-1 (Rp)



Article No.	DVGW Approved	Standard		Dimension (mm)
		Size		L
421190002		1/4	1/8	25
421190003		3/8	1/8	26
421190004			1/4	26
421190005D	✓	1/2	1/4	34
421190006D	✓		3/8	34
421190007D	✓	3/4	3/8	36
421190008D	✓		1/2	36
421190009D	✓	1	1/2	42
421190010D	✓		3/4	42
421190011D	✓	1-1/4	3/4	48
421190012D	✓		1	48
421190013D	✓	1-1/2	1	52
421190014D	✓		1-1/4	52
421190015D	✓	2	1-1/4	58
421190016D	✓		1-1/2	58
421190017		2-1/2	1-1/2	65
421190018			2	65
421190019		3	2	72
421190020			2-1/2	72

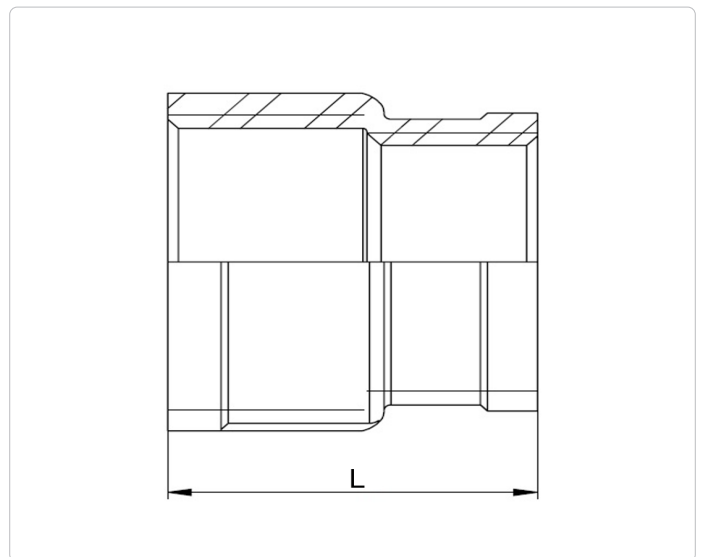

- ISO4144 standard cast fittings, CF8M (1.4408) cast version of 316 (1.4401)
- Thread acc. to ISO 7-1, DIN EN 10226-1 (old DIN 2999 & BS21); parallel female thread Rp (BSPT).
- Pressure ratings:

Temperature C°	Non-shock max. working pressure bar
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

*Temperatures indicated are those of internal fluid
Piping loads, stresses and moments are not taken into account.